



PLATFORM BUMPERS B410-14



Dimensions of laminated area:

12 cm projection

10 cm wide

10 cm high

Metallic support:

5 mm double angle with 5/8" holes for anchor screws

Application:

Ideal for platforms for 1.2 m high S.N.P.T.
For medium-severe duty. Its robust design withstands the impact of the heaviest trucks and containers.

- Maintenance free
- 2 Years warranty
- Chinese manufacturer
- Medium duty 5mm steel angles
- Absorbs over 80% of truck impact and shock
- Projection 12 cm- Width 19 cm - Height 61 cm
- Model BV424-8

MATERIAL

- Fabric reinforced rubber pads cut from selected recycled truck tires
- 5 mm black powder coated steel angles
- 3/4 steel carriage bolt tie rods

FEATURES

- Tough plies of truck tires provide superior resistance to chipping or abrasion; unlike molded rubber, extruded rubber, conveyor belting or wood plank bumpers.
- Attractive deep black color simulates a neat, professional look for your loading dock.
- Anchor bolts are protected by at least 3" of rubber to prevent damage.

INSTALLATION

- Structural steel angles mechanically fastened or welded by 20 mm anchors to dock face.
- Weldable flat plate option available at no additional cost.

WARRANTY


- 2 years manufacturer warranty

SPECIFICATIONS

- Resilient rubber material of bumpers shall be sourced from truck tires cut to uniform size pads and punched to receive 20 mm supporting rods.
- All bumpers must be 12 cm and closed with two 5mm structural angles under approximately 1200 lbs of pressure.
- The anchor leg of the angle extends minimum of 3" beyond the rubber surface at either end and contains.
- 20 mm anchor bolt holes as required (anchor bolts not supplied)
- Angles are black powder coat finish.

Distributed by:

RITSA
DOCK EQUIPMENT

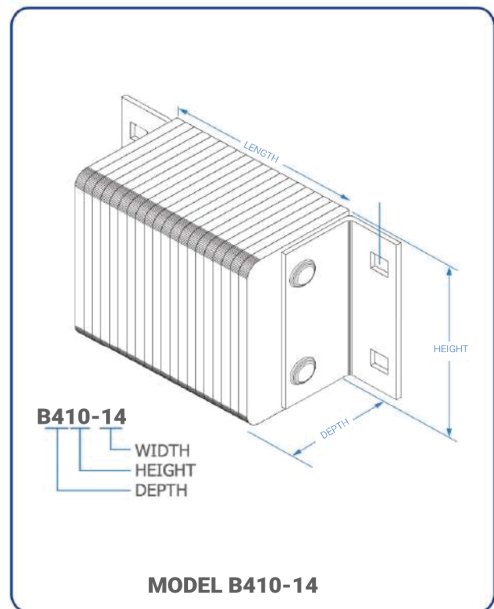

Manufacturer: Master Well Enterprise Limited

501, CKK Building , No. 8 Xingchang Road (N), Wuxi, Jiangsu, China

+86 510 8877 2866

public@masterwellhk.com